

**15-inch 100mm Midbass Driver
SML1510088A**



Features:

1. High temperature resistance N38SH magnetism steel
High sound pressure, strong shock, high temperature resistance, sufficient power, clear voice.
2. Imported paper basin, 3 times durable
Locating elastic wave in loudspeaker not only acts as brake, but also has the ability to "return to reset" on voice coil distance.
3. Up to 100 hours fog extension testing
Nd-Fe-B magnetic energy is about ten times higher than that of ordinary speaker.
4. Wool fiber basin, better than excellent
With regard to products, we are even willing to improve them with a stubborn attitude, so that you can get rid of worries and enjoy high quality products to touch your music every time.

15-inch 100mm Midbass Driver


Model: SML1510088A




Specification:

Model	SML1510088A
Description	15-inch 100-core midbass speaker
Installation aperture	About 354mm
Diagonal screw hole	About 374mm
Height	About 182mm
Outer diameter	About 395mm
Voice coil	100-core pure aluminium flat wire
Cone paper	Imported wool fabric selvage
Magnet material	NdFeB 97 magnetism
Frame material	Cast aluminum frame
Rated Impedance	8 ohm
DC Impedance	6 ohm
Rated Power	600 Watts
Maximum power	1.2K Watts
Sensitivity	98 dB/1W/1m
Frequency range	43-2.5K Hz
Resonant frequency	33Hz
Electrical Quality Factor Number	0.23
Mechanical Quality Factor Value	4.3
Total Quality Factor Number	0.22
Effective Volume	139 liters
Vibration Area	855.0cm ²
Magnetic Force	28 T _{xm}
Effective Mobile Quality	173g
Place of Origin	Guangzhou, China
Net Weight	About 10KG (No packaging)

Good products should talk with data

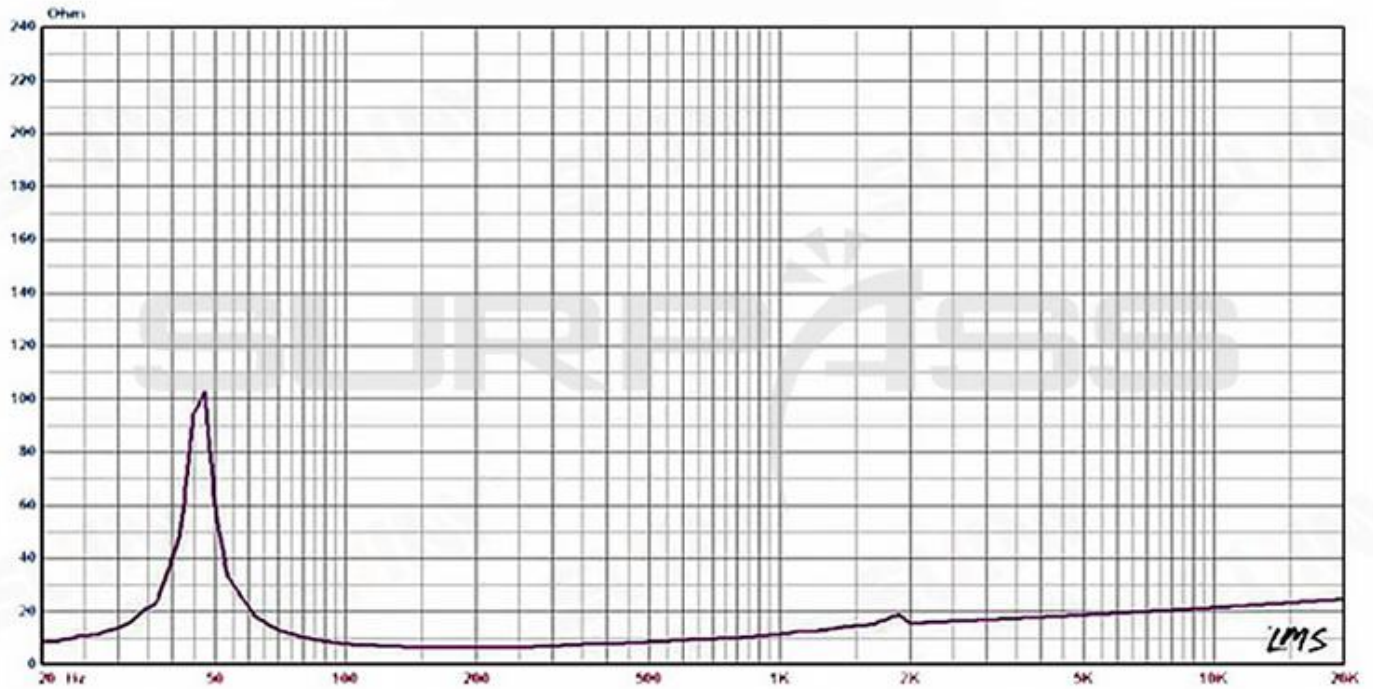

Impedance/Mixer Frequency Sweeping Regulation

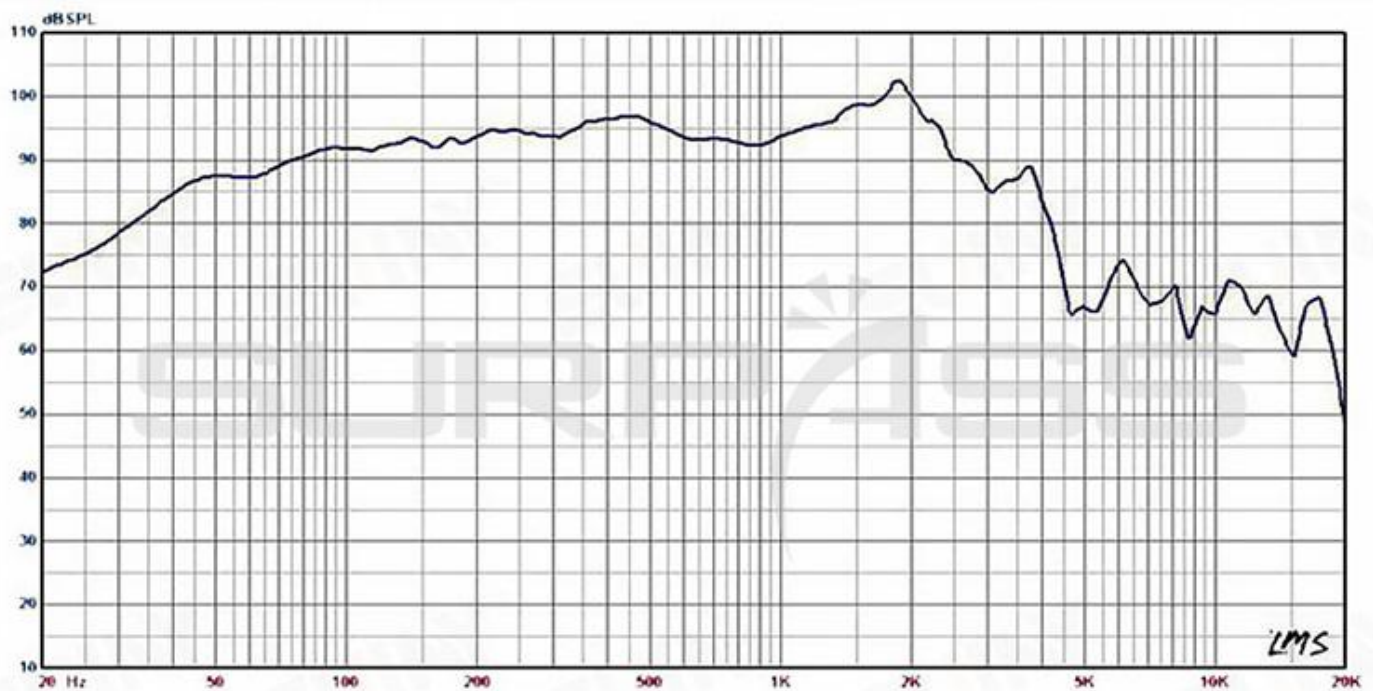

Sound Pressure Level/Mixer Frequency Sweeping Regulation