

21-inch 125mm Subwoofer SW2112583



Features:

1. Shock bass, wake up your nerves Pore design around one circle of magnetic steel to solve the working heating problem of voice coil.

2. High temperature resistant copper wire After thousands of hours of repeated debugging, low-frequency steady and forceful, enough power.

3. Powerful low frequency, mature and stable sound quality

Outstanding magnetic steel material makes the power and sensitivity of the speaker more expressive, better response and lower distortion than that of the ordinary speakers.

4. Steady bracket, firm without drift

High-end 125-core ferrite ultra subwoofer, excellent ultra-low audio, exquisite craftsmanship, full and true sound quality. Responsible for outdoor professional performances, 1KW is more suitable for large-scale performances.



SURP/ISS

Model: SW2112583



Open hole diameter





www.surpass-audio.com; Email: info@surpass-audio.com Page 1/3




Specification:

Model	SW2112583
Description	21-inch 125-core subwoofer
Installation aperture	About 500mm
Diagonal screw hole	About 520mm
Height	About 248mm
Outer diameter	About 545mm
Voice coil	125-core pure copper coil
Cone paper	Imported RDM selvage
Magnet material	Ferrite 250 magnetism
Frame material	Cast aluminum frame
Rated Impedance	8 ohm
DC Impedance	6 ohm
Rated Power	1.2K Watts
Maximum power	2.4K Watts
Sensitivity	96.5 dB/1W/1m
Frequency range	30-1K Hz
Resonant frequency	30Hz
Electrical Quality Factor Number	0.24
Mechanical Quality Factor Value	10
Total Quality Factor Number	0.23
Effective Volume	269 liters
Vibration Area	0.168m ²
Magnetic Force	40.8 Txm
Effective Mobile Quality	407g
Place of Origin	Guangzhou, China
Net Weight	About 19.2KG (No packaging)





Good products should talk with data

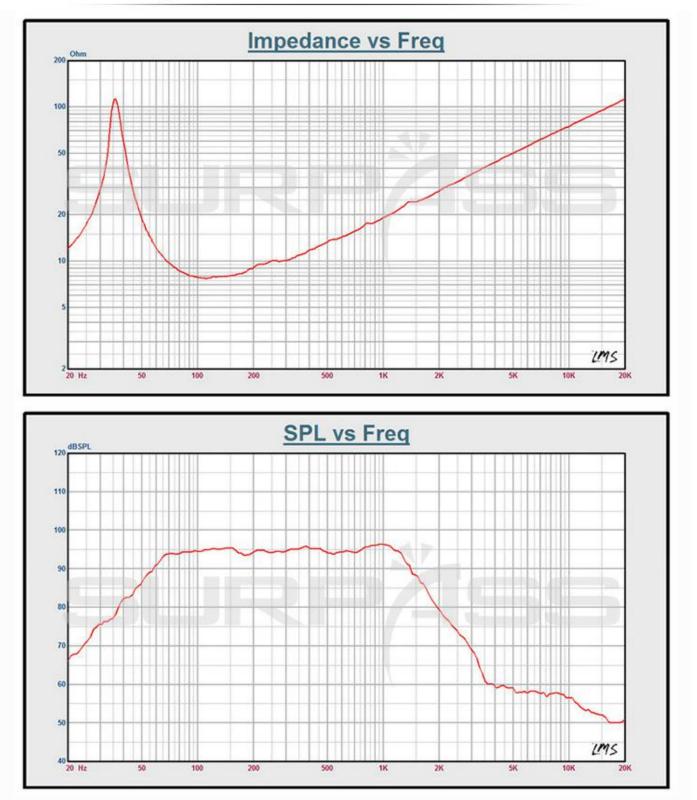

SURPÄSS

www.surpass-audio.com; Email: info@surpass-audio.com Page 3/3