


## 75mm Core Neodymium HF Driver SH7531

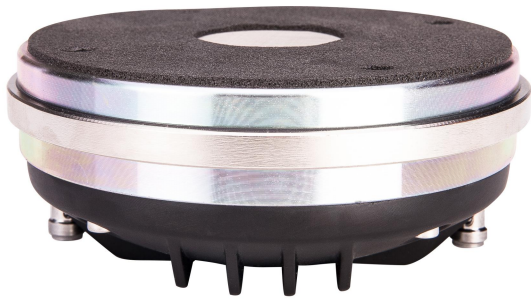

### Features:

1. Metal terminal

The convenient and easy-to-understand connection mode of copper terminal brings more time-saving and labor-saving for installation

2. Installation is convenient and fast

well-designed of EVA, more suitable to the appearance of the product, highlighting the delicate taste

3. Nd-Fe-B magnetism

N40SH magnet steel makes the speaker more sensitive in power and better in timbre performance

## 75 core neodymium magnet



**Specification:**

<b>Model</b>	<b>SH7531</b>
<b>Description</b>	75-core neodymium treble
<b>Outer diameter of magnetic steel</b>	131mm
<b>Diagonal screw hole</b>	100mm
<b>Throat diameter</b>	78mm
<b>Diaphragm material</b>	Titanium
<b>Magnet</b>	131 magnetic
<b>Voice coil</b>	75-core copper-clad aluminium flat wire
<b>Height</b>	About 5.5cm
<b>Magnetic steel material</b>	NdFeB N40SH
<b>Rated Impedance</b>	8 ohm
<b>DC Impedance</b>	6 ohm
<b>Rated Power</b>	80 Watts
<b>Maximum power</b>	160 Watts
<b>Sensitivity</b>	108 dB/1W/1m
<b>Frequency range</b>	80-20KHz
<b>Place of Origin</b>	Guangzhou, China
<b>Net Weight</b>	About 2.5KG

Good products should talk with data

