

RCF 15-inch 75mm Midbass Driver SML157529



Features:

1. Excellent sound quality, high cost-effective Choose large heat dissipation constant temperature magnetron technology, sound performance is clearer

2. Imported selvage

Use thickened cast Aluminum basin frame, imported DuPont elastic wave, high power 75.5 core high temperature eesistant copper-clad Aluminum flat wire voice coil, 36 high strength braided yarn, let the voice flow smoothly and calmly, gently and pleasantly.

- 3. Real capture of human voice restoration Excellent sound quality, with ultra-high cost-effective, delicate to every breath can be perceived.
- 4. High transmission efficiency and excellent resolution High quality detail resolution, whether rock or pop or lyric music can bring you high restoring sound effect.

RCF 15-inch 75mm Midbass Driver





SURP/155

Model: SML157529






Specification:

Model SML157	YE 20
	529
Description RCF 15-inch 75-core	midbass speaker
Installation aperture About35	1mm
Diagonal screw hole About 37	2mm
Height About 17	0mm
Magnet material Ferrit	re
Frame material Cast aluminu	ım frame
Rated Impedance 8 ohr	m
DC Impedance 6 ohr	m
Rated Power 400 Wa	atts
Maximum power 700 Wa	atts
Sensitivity 99 dB/1V	V/1m
Frequency range 40-3K	Hz
Resonant frequency 45Hz	Z
Electrical Quality Factor Number 0.52	!
Mechanical Quality Factor Value 7.6	
Total Quality Factor Number 0.5	
Effective Volume 160 lite	ers
Vibration Area 830.0c	m ²
Magnetic Force 15.3 Tx	xm
Effective Mobile Quality 83g	
Place of Origin Guangzhou	, China
Net Weight About 8.5KG (No	packaging)






Good products should talk with data

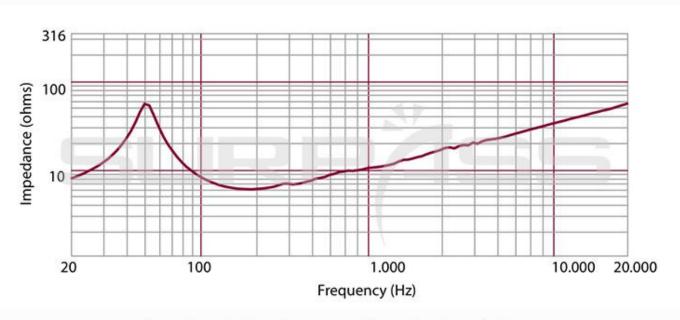

Impedance/Mixer Frequency Sweeping Regulation

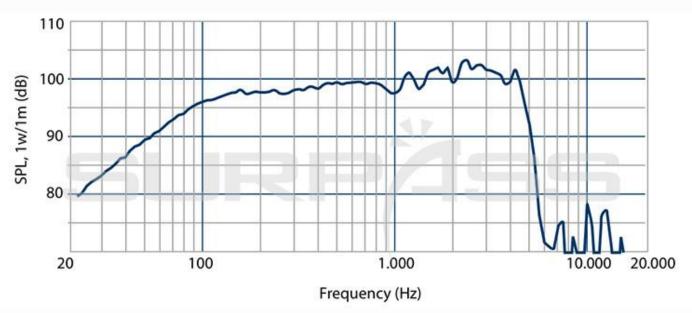

Sound Pressure Level/Mixer Frequency Sweeping Regulation

